




FG5000 & FG10000 Flywheel Grinder Coolant Pump Kit TEFC

794-8621-85

The Totally Enclosed, Fan Cooled, Coolant Pump Kit from Van Norman will take the coolant pump out of the coolant.

This is a "retro-fit" for replacing the existing water cooled coolant pump.

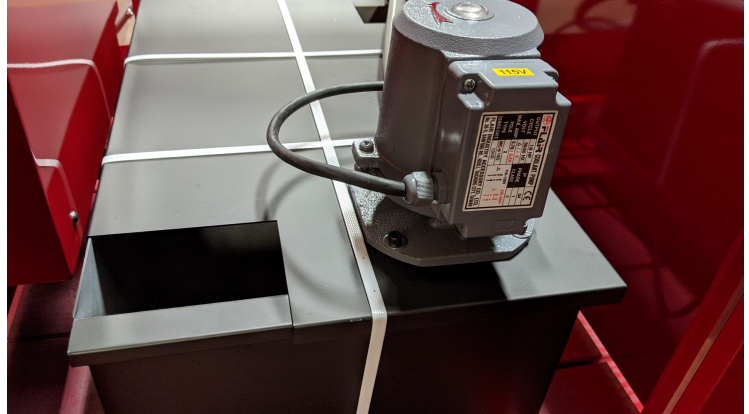

What's Included

[794-8621-81] FG Recirculating Pump TEFC 115/230v 50/60Hz 1/8HP	1.0000	Piece
[794-8620-46] FG Tank Cover / Lid	1.0000	Piece
[000-1020-08] Hex Nuts	4.0000	Pieces
[000-1170-48] Lock Washers	4.0000	Pieces
[000-1145-02] Flat Washers	8.0000	Pieces
[000-0165-35] Socket Head Cpa Mounting Screws	4.0000	Pieces
[794-8071-36] Nylon Barb Plumbing Fitting	1.0000	Piece
[000-2403-38] Wire	8.0000	Foot(ft)
[000-1244-19] Term Eyelets	2.0000	Pieces
[794-8048-43] Spade Terminals	4.0000	Pieces

Installation is easily accomplished by attaching the pump to the new Tank Cover and placing over the tank as shown in the photo above. The wire into the side panel using the same terminal locations as the original pump. Finally, use the Nylon Barb Fitting to connect the coolant feed hose.

The new cover has view ports. The operator can visually check for coolant level. Additional coolant can be added through those openings when a top-off is needed. It's important to keep the coolant level high enough to flow over the tank baffle.

Of course, the cover assembly will need to be removed when it's time to clean and change cooling solution. It is recommended to clean out the coolant tank after every 25 flywheels or more frequently as needed.

If you have questions you can always call Van Norman by Irontite Technical Support at 1+ 319-377-9421 or 800-553-5953